Thompson SpeedTouch ADSL modem Installation

Before you start with installation, check the content of box which you obtained.
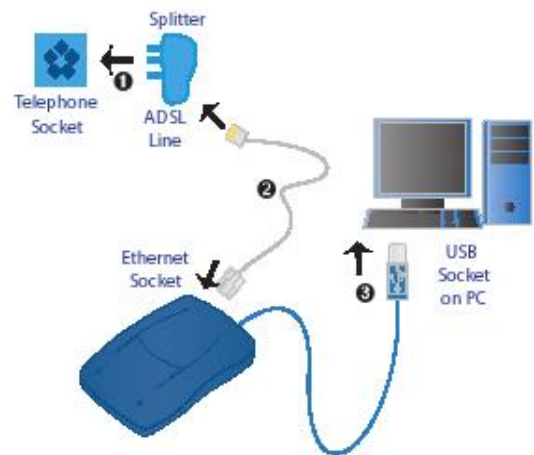
It should contain the following components :

a) SpeedTouch ADSL USB Modem;

b) Splitter;

c) Installation CD;

d) Telephone cable;

You should connect it all properly if you follow the steps:
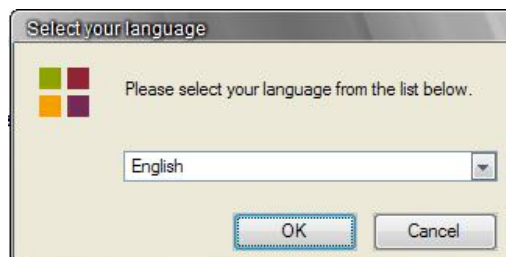
1. Device connection:

* Connect ADSL splitter with your telephone line.

* Connect telephone cable with port "Phone" and your telephone

* Connect telephone cable to "ADSL" port and with ADSL device, **when required during the installation process.**

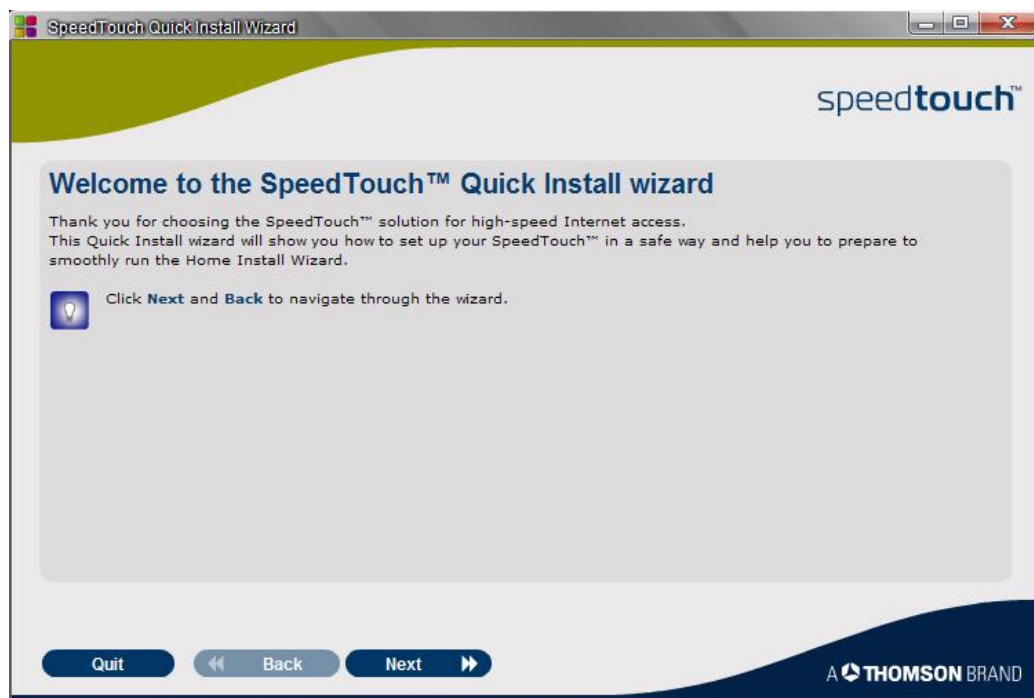* Connect USB cable with free USB port on your computer, **when required during the installation process.**

2. Software installation:

* Insert installation CD from the box;

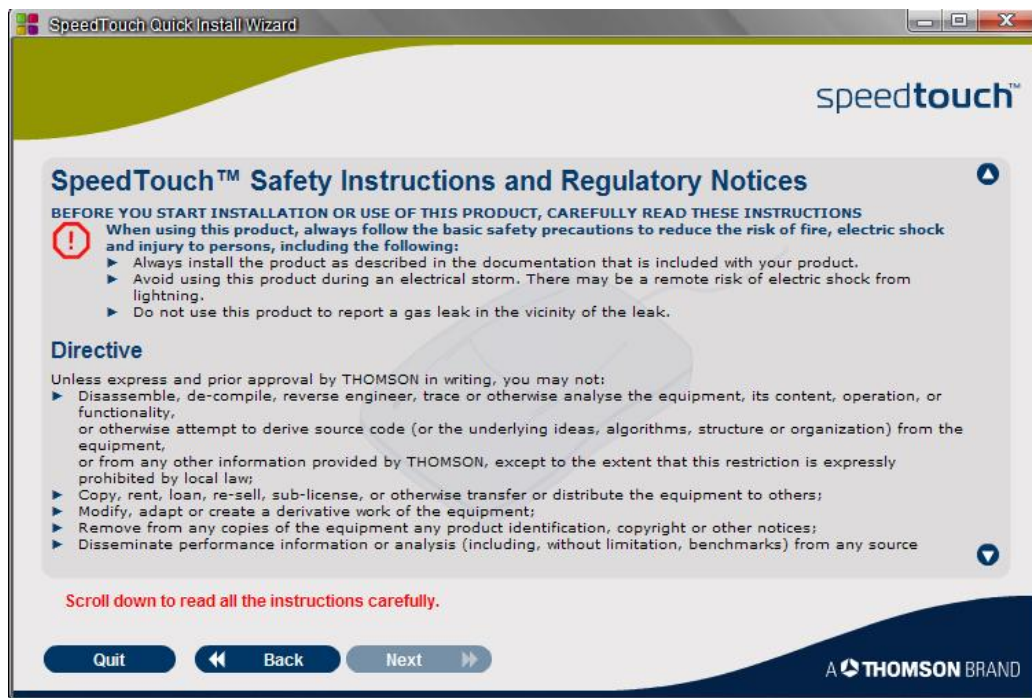* If setup process doesn't start automatically, open CD and click on **setup.exe .**

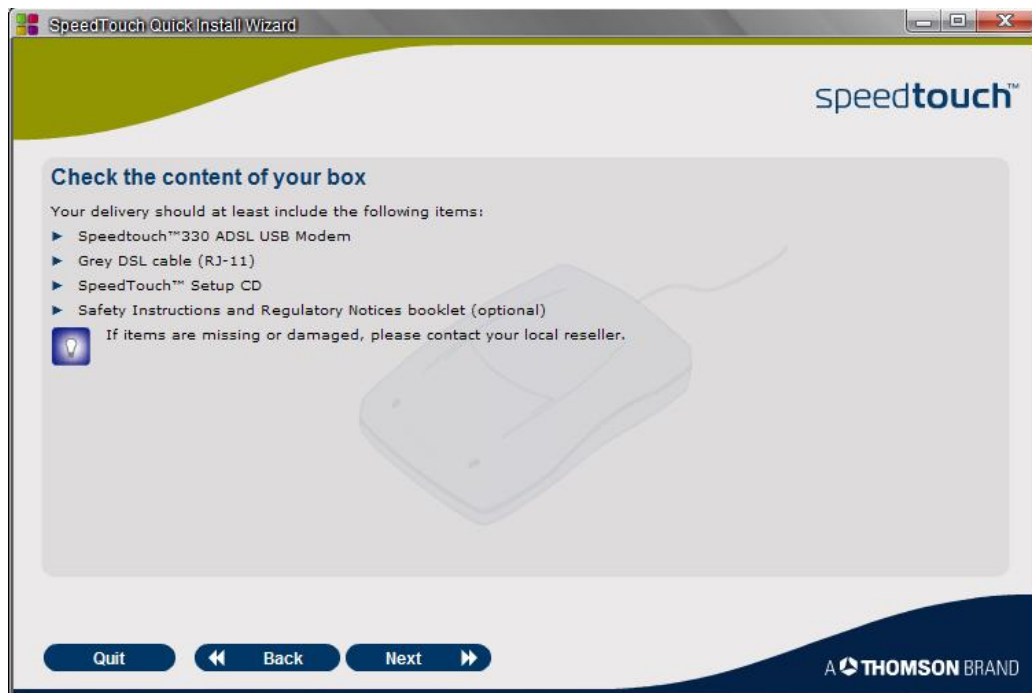* In menu choose option **English**, then click **OK.**

* Click **NEXT.**

* Choose first left modem on the picture (click on the picture).

* Scroll till the end of the text, and check the field **I Have read ...** then click **NEXT.**
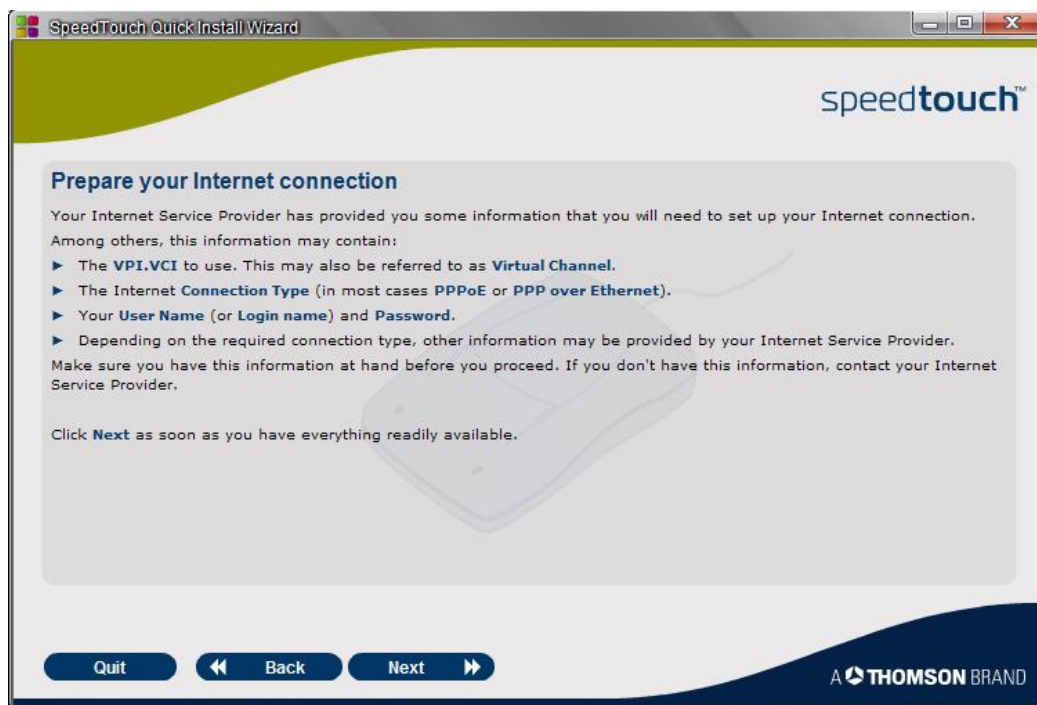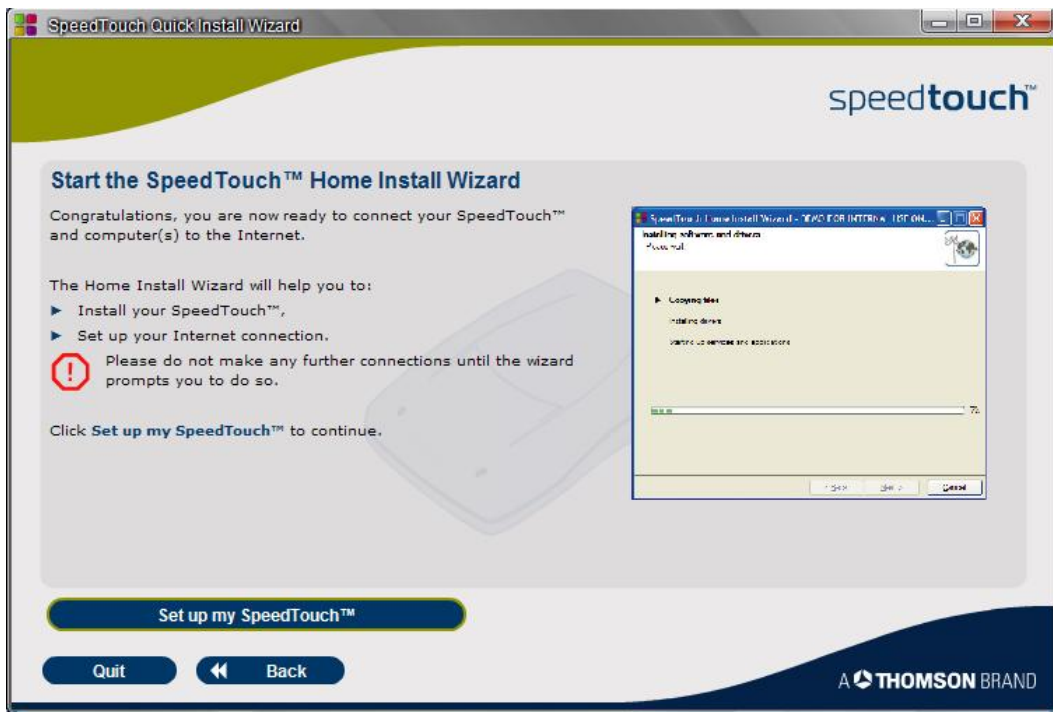

* Click **NEXT.**

Connect the SpeedTouch™ to the DSL line

Proceed as follows:

1 Plug the included DSL cable into the DSL port of your Speedtouch™.

2 Plug the other end of the cable into your telephone socket or DSL splitter.

You will need to plug a DSL filter into any telephone socket where you intend to use regular phone services for telephone calls, fax data or a dial-up modem.

Do **not** connect your SpeedTouch™ to the computer yet.

Quit   Back   Next

* Connect telephone cable with ADSL modem. Do not connect USB modem cable with your computer.

* Click **NEXT.**

Prepare your Internet connection

Your Internet Service Provider has provided you some information that you will need to set up your Internet connection. Among others, this information may contain:

► The **VPI.VCI** to use. This may also be referred to as **Virtual Channel.**

► The Internet **Connection Type** (in most cases **PPPoE** or **PPP over Ethernet**).

► Your **User Name** (or **Login name**) and **Password.**

► Depending on the required connection type, other information may be provided by your Internet Service Provider.

Make sure you have this information at hand before you proceed. If you don't have this information, contact your Internet Service Provider.

Click **Next** as soon as you have everything readily available.
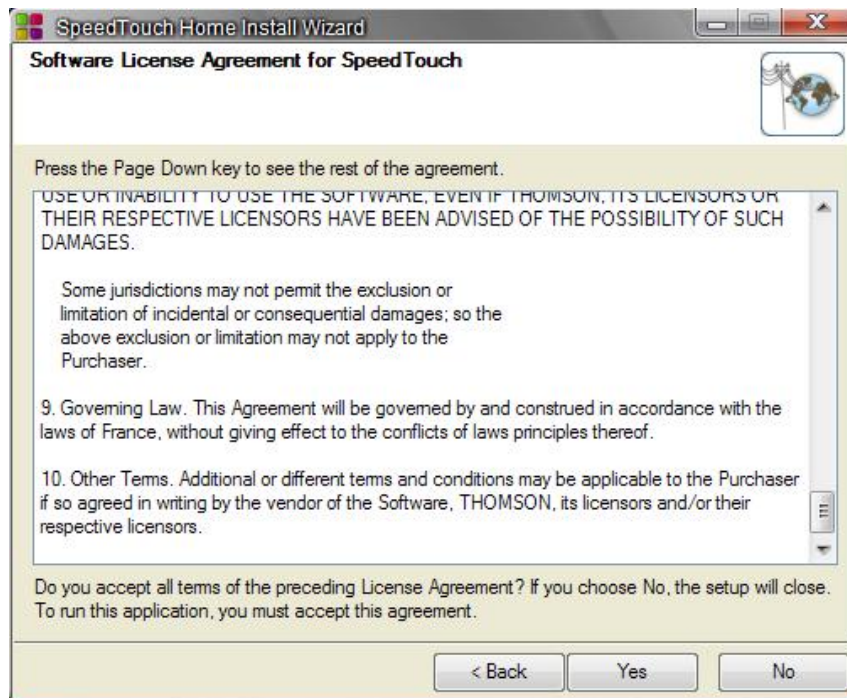
Quit   Back   Next

* Click **NEXT.**

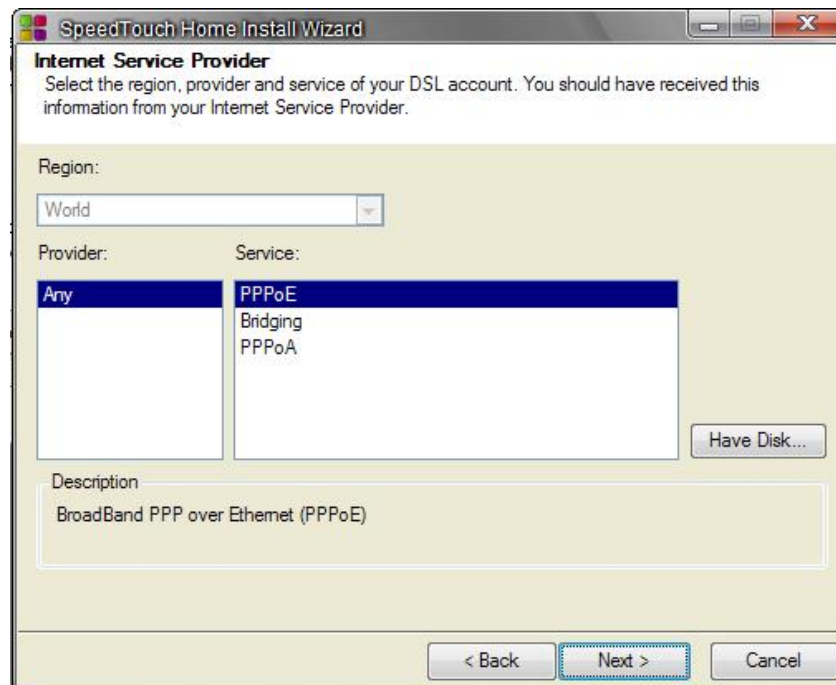* Software is installed. It is necessary that you set ADSL modem now.
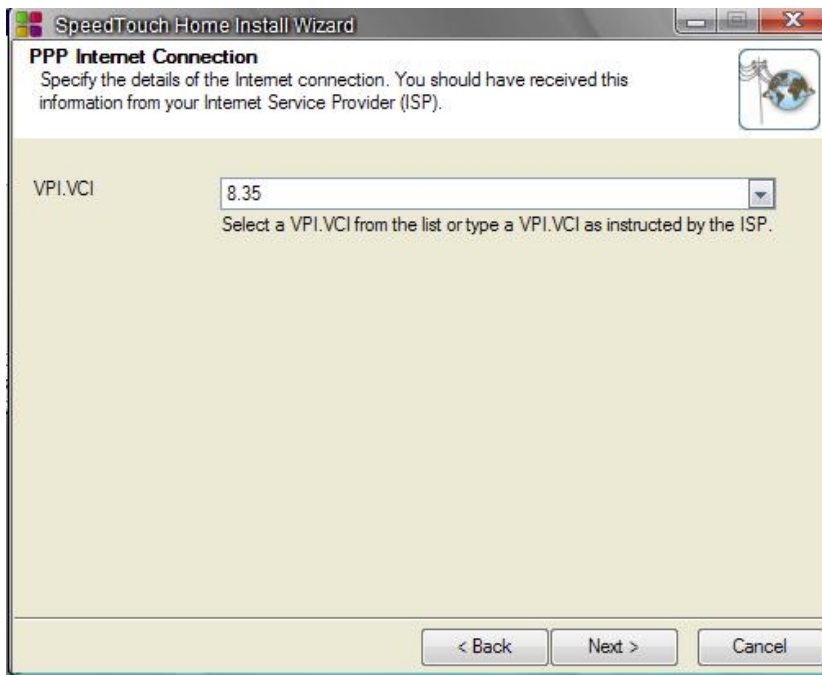
* Click **Set up my SpeedTouch**.
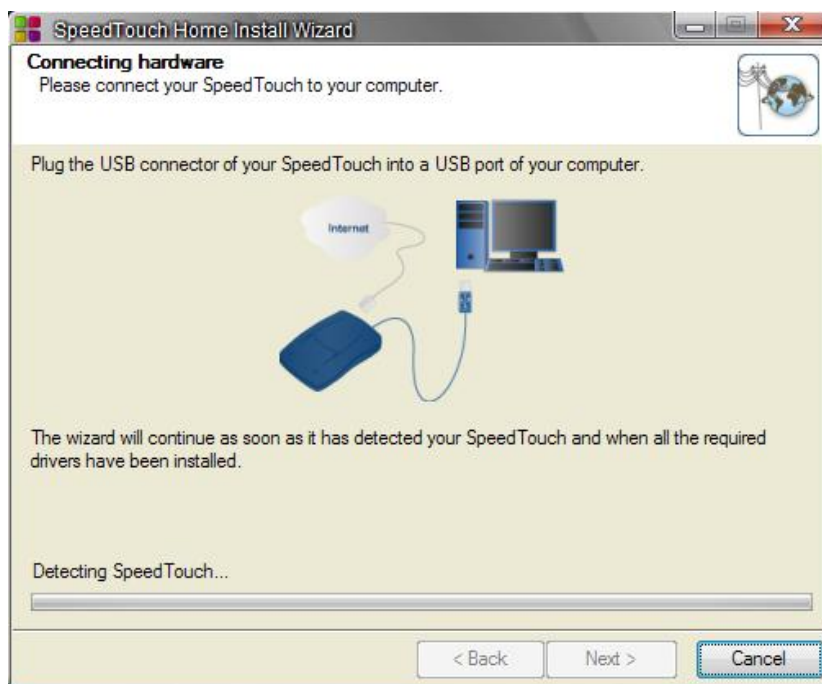

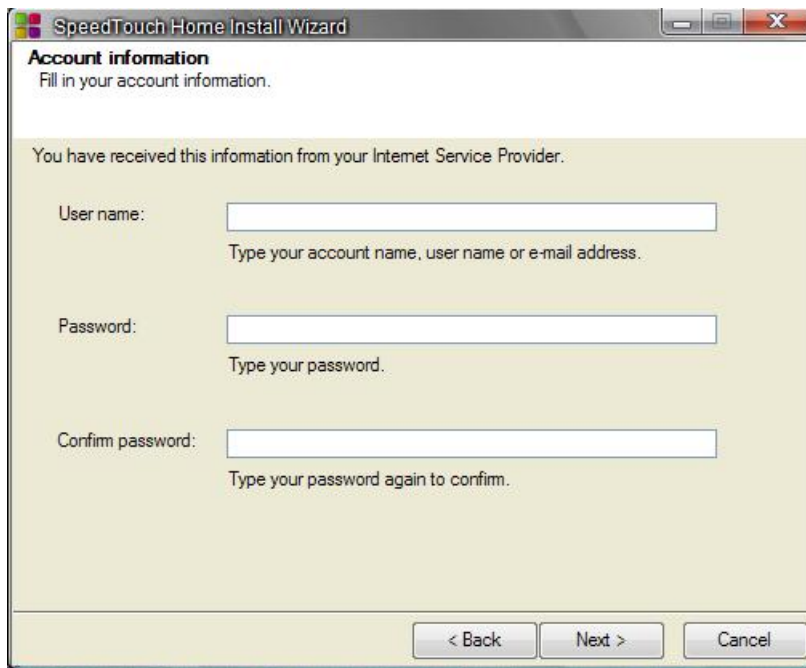* When this picture appears, click **NEXT.**

* Click **YES.**

* From menu choose **PPPoE** connection, then click **NEXT**.

* From menu choose **8.35**, then click **NEXT**.

* Now you should connect USB modem cable to USB port of your computer, and then after SpeedTouch ADSL modem detection, click **NEXT**.
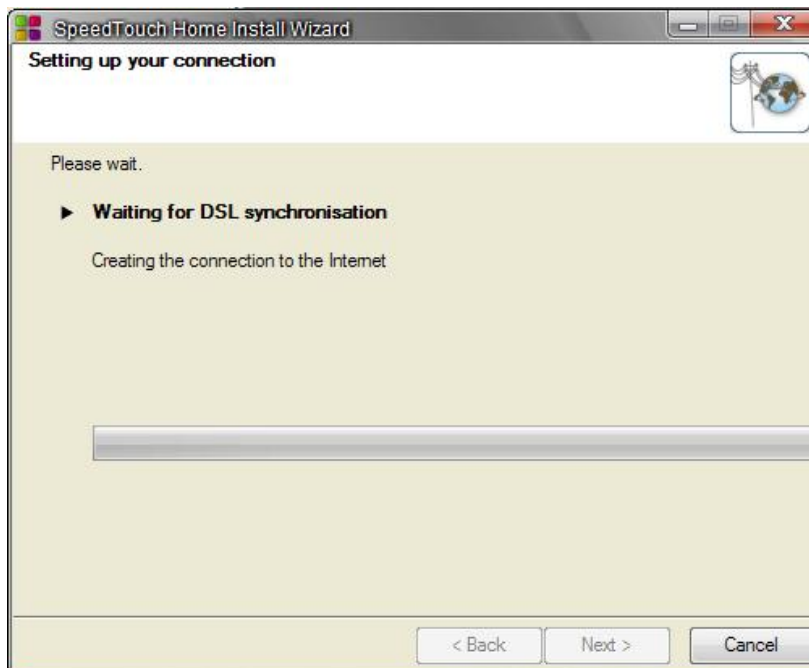
* Field **Username**: insert your username, in form **username@verat.net.**

* Field **Password**: insert your password.

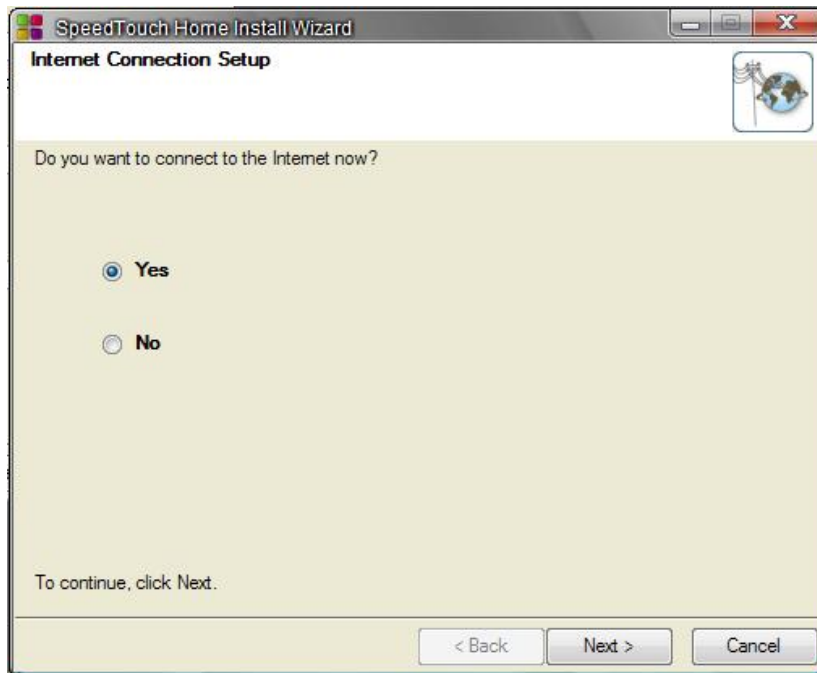* Field **Confirm password:** insert your password once again, then click **NEXT**.

NOTE: Your Username and password must not be inserted with Caps Lock, and your keyboard must be on English language set.

* When process is finished, click **NEXT**.

SpeedTouch Home Install Wizard

Internet Connection Setup

Do you want to connect to the Internet now?

◉ Yes

○ No

To continue, click Next.

[< Back] [Next >] [Cancel]

* Choose option **YES**, click **NEXT**.

For any additional information contact our Customer service on: 011/2444 318.